
## ADAPTOR DATASHEET



## 2.4MM(MALE)-GPO(SMP)(MALE)

## 2.4/GPO-JJ

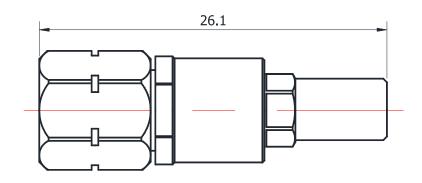

\*Dimensions are in mm

Configuration		
Connector 1 Type	2.4mm Male	
Connector 1 Impedance	50 Ohms	
Connector 1 Polarity	Standard	
Connector 2 Type	GPO(SMP) Male	
Connector 2 Impedance	50 Ohms	
Connector 2 Polarity	Standard	
Connector Mount Method	None	
Adapter Body Style	Straight	
Frequency	DC to 40 GHz	
Frequency	DC to 40 GHz	
Insertion Loss (dB)	< 0.05 xSat.(f GHz)	
Insertion Loss (dB) Return Loss	≤ 0.05 xSqt.(f_GHz) 1.25	
Return Loss	1.25	
Return Loss  Materials Information	1.25	
Return Loss  Materials Information  Center Contact	1.25  CuBe Gold Plated	
Return Loss  Materials Information  Center Contact  Outer Contact	1.25  CuBe Gold Plated Stainless Steel	
Return Loss  Materials Information  Center Contact Outer Contact Body	1.25  CuBe Gold Plated Stainless Steel Stainless Steel	
Return Loss  Materials Information  Center Contact  Outer Contact  Body  Dielectric	1.25  CuBe Gold Plated Stainless Steel Stainless Steel	

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Gwave Technology Co.,Ltd.

No.33 Building,Hanjiachuan Yard,Haidian District,Beijing
China(100094) www.gwave-tech.com

Tel.: +86 10 62450051/52 Fax: +86 10 62450053 Email: gwave@gwave-tech.com Page

1 / 1