



GH(FEMALE) FOR PCB 8 POSITION BOARD CONNECTOR

GH-ZWGJ8SCHEM.NI

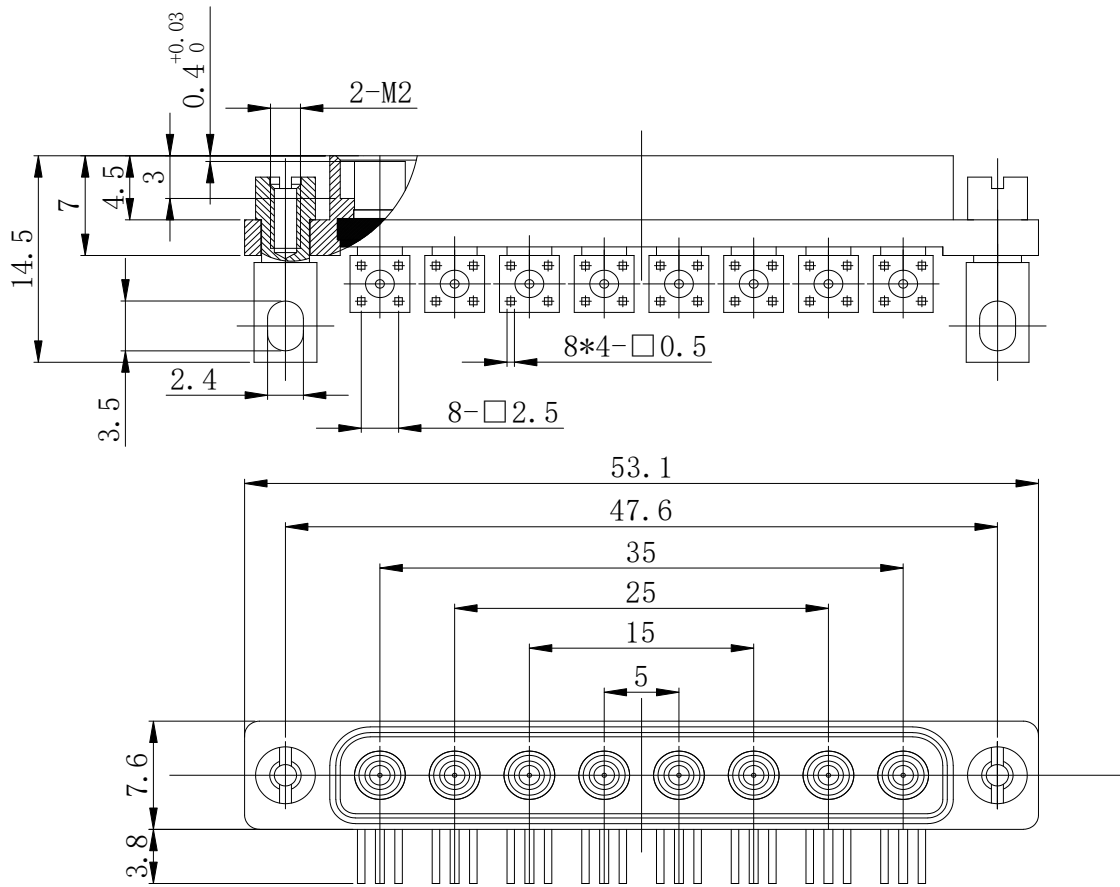

PCB Layout

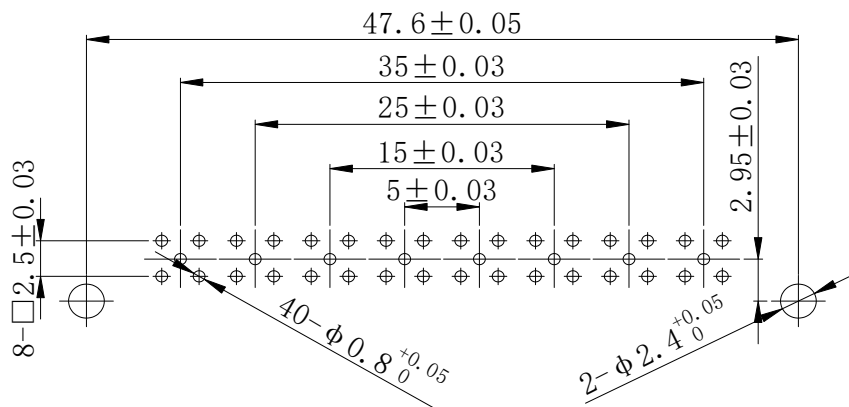

\* Label and Shrinking tube design depend on customer's request.

## Configuration

Connector Type	GH-ZWGJ8Schem.Ni
Connector Body Style	Right Angle
Body Material and Plating	Chemical nickel
Connector Mount Method	Bend insert PCB
Connector Docking End Model	GH-TGK8Schem.Ni

## Electrical Specifications

Impedance	50 $\Omega$
Frequency	DC to 40GHz
Return Loss/VSWR	14dB to 40GHz

## Materials Information

Centre Contact	CuBe Gold Plated
Outer Contact	Glass Gold Plated
Body	Electroless nickel plating on aluminum
Dielectric	PTFE

## Environmental Data

Temperature Range	-55°C to +165°C
2002/95/EC(RoHS)	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty or our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.